



PALAZZO® Style
The stylish parasol

NEW
+ 16 sizes



Unique selling proposition

- Palazzo line design language: uniform design of the models Royal, Noblesse and Style
- Continuous mast profile down to the floor covering (internal support tube & tip-over hinge)
- Counter-rotating opening principle (with crank or motor):
Opened with just 4–13 turns of the crank (patented)
High closing height (no need to move the furniture)
- 115 km/h wind stability at size 300 × 300 cm
- Top quality material selection
- LED lighting system integrated into the struts
- Professional additional options (Heating, rain gutters, ...)
- Special product solutions (Sizes, frame, fabrics, ...)

Places of use

- Small area outdoors
- Terraces & rooftops
- Public spaces & parks
- Corrosive environments





Basic model

Frame

- 8 parts made from anodised aluminium
- Anti-rotation mast including reinforcing struts
- Mast profile Ø 105 mm and 4.5 mm wall thickness
- Roof struts 23 × 40 mm

Frame material

- Aluminium: EN-AW-6063-T66
- Screws and rivets made from stainless steel A4
- Glass-fibre reinforced plastic parts: PA6GF30
- Anodisation:
 - Profile surface finishing
 - High degree of hardness – wear resistance (“scratch-resistant”)
 - Increased corrosion resistance
 - Natural appearance (adaptation to environment)
 - Modern look (luxurious matt)

Frame colour

- Anodised natural matt (standard)
- RAL 7016 powder-coated (no surcharge)
- RAL colours powder-coated (surcharge)
 - Powder coating on anodised profiles
 - (providing additional corrosion protection)

Opening principle

- Counter-rotating (telescopic system)
- Patented opening using a toothed belt
- Opened with just 4–13 turns of the crank

Drive

- With hand crank (detachable)
- With motor (surcharge)

Canopy

- With or without flounce
- Adjustable (adjustable strut extensions)
- 100 % polyacrylic approx. 300 g/m² (spun dyed)
- Replaceable or interchangeable canopies

Wind stability

- Up to 120 km/h (with fixed anchorage)
- Tested in a wind tunnel

Fixations

[More information](#)

- Bases / parasol stands / covers
- Ground sockets
- Mounting plates without or with installation height made to measure
- Mounting plates for insulation floors
- Glatz Concrete Cube M4/M8/M16
- Base plates made to measure

Additional options – Standard accessories


[More information](#)

- LED lighting system (RGBW)
- Infrared radiant heater
- Motorisation
- BUS systems / connection to the home control system
- Rain gutters
- Side walls
- Protective covers with corset lacing
- Strap systems
- Impact protection
- Anti-theft system (integrated)

Special product solutions – Made to measure

[More information](#)


- Special sizes & intermediate measurements (increments 1, 2 & 3)
- Mast extensions & reductions max. + 1000 mm / - 500 mm
- Frame in all RAL colours
- Glatz Green® Special fabric
- Special fabrics (third-party fabrics, PVC & flame retardant)
- Custom flounces & edging strips
- Printing & advertising print

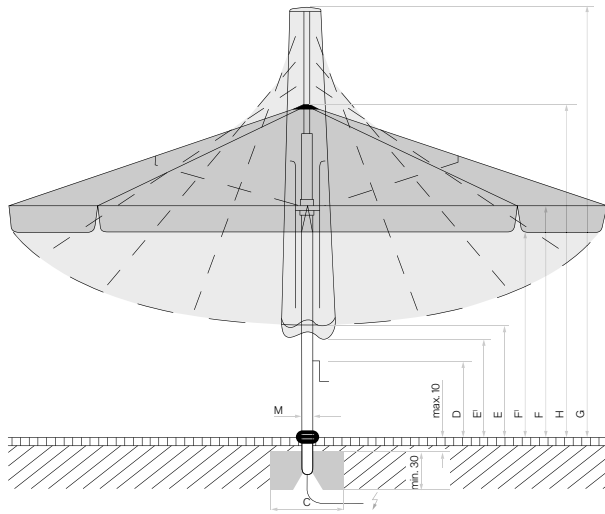

Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), guarantee water drainage, supply line electric.

💡 LED positions on the Palazzo Style with LED

⊞ Radiant heater positions on the Palazzo Style with radiant heater

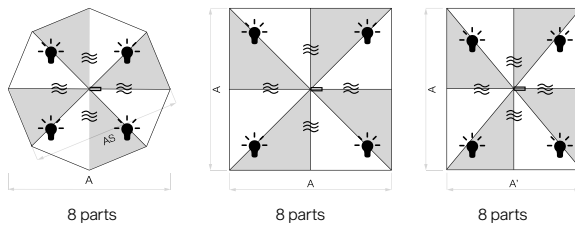

Nominal size	Number of ribs	Lateral distance	Mast Ø	Area covered	Crank handle height	Height closed / with flounce	Clear headroom / with flounce	Total height	Height open	Foundation	Minimum weight for base	¹⁰ max. wind speed open
cm		cm	cm	m ²	cm	cm	cm	cm	cm	cm	kg	km/h (Bft.)
A		AS	M		D	E / E'	F / F'	G	H	C		
Ø 300	8	277	10.5	7.1	85	187 / 162	235 / 210	338	279	90 x 90	180	120 (12)
Ø 350	8	325	10.5	8.7	85	179 / 154	235 / 210	356	285	90 x 90	180	115 (11)
Ø 400	8	370	10.5	11.3	85	176 / 151	235 / 210	378	292	90 x 90	180	90 (10)
Ø 450	8	415	10.5	14.3	85	178 / 153	235 / 210	406	299	100 x 100	180	75 (9)
Ø 500	8	460	10.5	17.7	85	169 / 144	235 / 210	423	305	100 x 100	240	70 (8)
Ø 550	8	508	10.5	21.4	85	153 / 128	235 / 210	433	312	110 x 110	310	65 (8)
Ø 600	8	554	10.5	25.5	85	136 / 111	235 / 210	442	319	110 x 110	310	60 (7)
300 x 300	8	-	10.5	9.0	85	142 / 117	235 / 210	353	280	90 x 90	180	115 (11)
350 x 350	8	-	10.5	12.3	85	124 / 99	235 / 210	371	287	100 x 100	240	95 (10)
400 x 400	8	-	10.5	16.0	85	121 / 96	235 / 210	405	294	110 x 110	240	80 (9)
450 x 450	8	-	10.5	20.3	80	103 / 78	235 / 210	422	301	110 x 110	310	70 (8)
500 x 500	8	-	10.5	25.0	75	84 / 59	235 / 210	439	308	120 x 120	310	60 (7)
300 x 200	8	-	10.5	6.0	85	129 / 104	235 / 210	308	274	90 x 90	180	115 (11)
300 x 250	8	-	10.5	7.5	85	139 / 114	235 / 210	333	277	90 x 90	180	110 (11)
350 x 200	8	-	10.5	7.0	85	118 / 93	235 / 210	318	278	90 x 90	180	110 (11)
350 x 250	8	-	10.5	8.8	85	123 / 98	235 / 210	337	281	90 x 90	180	105 (10)
350 x 300	8	-	10.5	10.5	85	133 / 108	235 / 210	362	284	100 x 100	180	95 (10)
400 x 200	8	-	10.5	8.0	85	100 / 75	235 / 210	322	283	90 x 90	180	95 (10)
400 x 250	8	-	10.5	10.0	85	106 / 81	235 / 210	341	285	90 x 90	180	90 (10)
400 x 300	8	-	10.5	12.0	85	117 / 92	235 / 210	366	288	100 x 100	180	85 (9)
400 x 350	8	-	10.5	14.0	85	125 / 100	235 / 210	391	291	100 x 100	240	80 (9)
450 x 250	8	-	10.5	11.25	85	101 / 76	235 / 210	361	303	100 x 100	180	90 (10)
450 x 300	8	-	10.5	13.5	85	100 / 75	235 / 210	370	292	100 x 100	180	80 (9)
450 x 350	8	-	10.5	15.8	85	109 / 84	235 / 210	394	295	100 x 100	240	75 (9)
450 x 400	8	-	10.5	18.0	80	111 / 86	235 / 210	413	298	110 x 110	240	70 (8)
500 x 250	8	-	10.5	12.5	85	85 / 60	235 / 210	366	303	100 x 100	180	85 (9)
500 x 300	8	-	10.5	15.0	85	88 / 63	235 / 210	380	296	100 x 100	240	80 (9)
500 x 350	8	-	10.5	17.5	85	96 / 71	235 / 210	401	299	110 x 110	240	70 (8)
500 x 400	8	-	10.5	20.0	75	101 / 76	235 / 210	422	301	110 x 110	240	65 (8)
500 x 450	8	-	10.5	22.5	75	98 / 73	235 / 210	436	305	110 x 110	310	60 (7)

¹⁰ 10 km/h less with flounce

The above measures represent extrapolated average values that may be slightly different on the product (± 2 % ± 5 cm).

If a minimum or a maximum height underneath is required, this must be agreed with Glatz.

Height dimensions are based on ground socket M4. These differ slightly depending on the type of base. Except for base M4, 180 kg plus 15.5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the min. distance between one parasol and another and between parasols and walls shall be 25 cm.

Opening and closing using a battery-operated drill is not permitted.



Glatz AG

+41 52 723 66 44
contract@glatz.com
glatz.com

