

TEAKWOOD



01/2026 en - 259.420.01.511 © by Glatz AG

TEAKWOOD

The elegant masterpiece in precious timber

> 98 %
UV
Protection



Frame	8 ribs Untreated teak Continuous pole Ø 48 mm Stainless steel fittings on rib ends
Function	Pulley system for opening and closing Fixed with a metal pin The runner can be fixed at various heights for optimum fabric tension Leather flaps for stowing the rope
Frame colour	Fine teak
Canopy	Fabric Quality 5: polyacrylic, 300 g/m ² , UV protection > 98 % Fabric Quality 4: polyester, 250 g/m ² , UV protection > 98 % Fabric corners reinforced with (white) leather
Flounce	Only available without
Protective cover	Included in delivery
Electrical accessories	Osyron Spot LED with integrated battery pack



Usage locations



Fixation



Valid from 1.1.2026
glatz.com



Assortment

Frame teak, untreated

Shape	Nominal size	Number of ribs	Order no.
	cm		
○	Ø 300	8	166 00 300 731
	Ø 350	8	166 00 350 731
□	330 x 330	8	166 00 331 731

Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height	Foundation	Minimum weight for base	Max. wind speed open
cm	cm	cm	m ²	cm	cm	cm	cm	kg	km/h (Bft.)
A	AS	M		E	F	G	C		
Ø 300	275	4.8	6.4	135	220	285	60 x 60	40	30 (5)
Ø 350	325	4.8	8.7	105	215	285	60 x 60	55	30 (5)
330 x 330	-	4.8	10.9	45	220	285	70 x 70	70	30 (5)


The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).

The height dimensions are based on the ground socket PX. In the base variations these might differ slightly. Apart from the steel base minus 7.5 cm.


For the variants with a mounting plate and support tube M4, the specified heights are reduced by 12–13 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.


In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

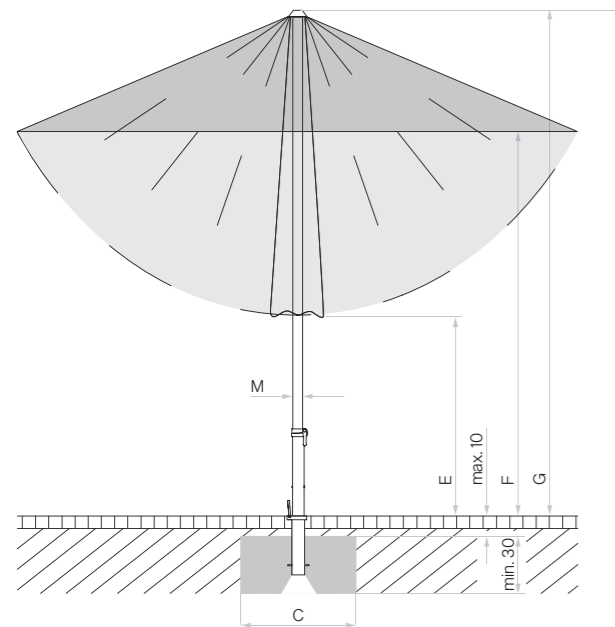


Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), guarantee water drainage



8 parts



8 parts

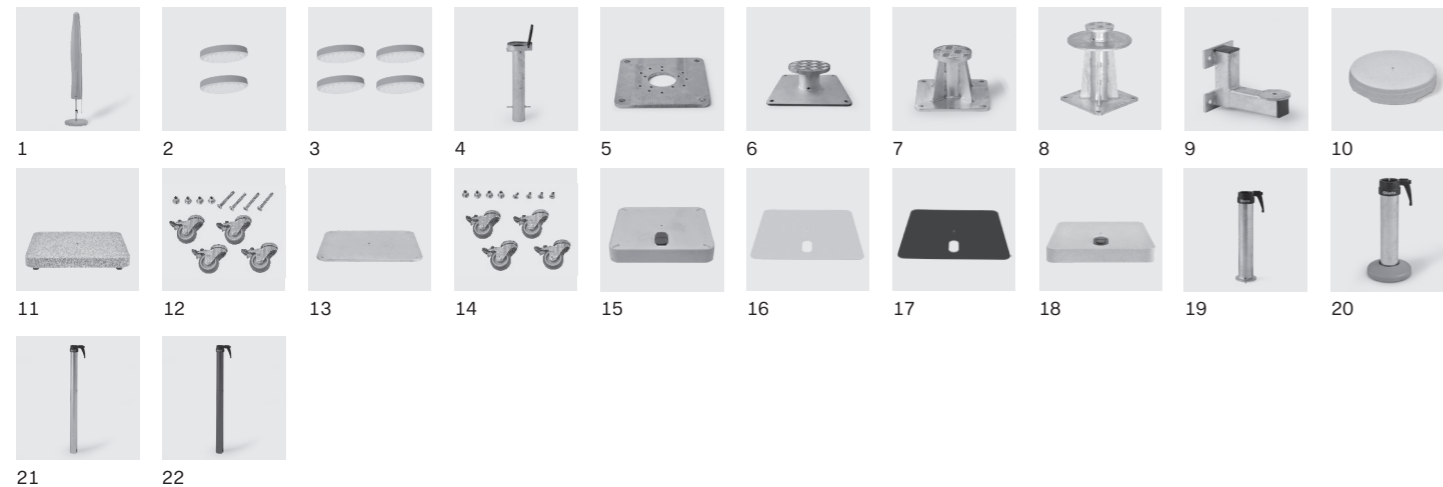

Accessories TEAKWOOD

Protective cover	Absolutely necessary	Order no.
Protective cover made of coated, tear-resistant polyester fabric		
1 Protective cover with zip and rod		350 01 609 979

Accessories

Electrical accessories		
2 OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3 OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100

Fixations

Ground sockets		
4 Ground socket PX, hot-dip galvanised steel	Connection tube PX	350 01 207 001
4 Ground socket PX, high-grade steel 1.4301 / 304	Connection tube PX	350 01 207 011

Mounting plates		
5 Mounting plate M4 / M8, 30 x 30 x 1.5 cm, hot-dip galvanised steel	Support tube M4	350 01 226 921
6 Mounting plate M4 special, for installation height 50–149 mm, hot-dip galvanised steel	Support tube M4	350 01 226 932
7 Mounting plate M4 special, for installation height 150–350 mm, hot-dip galvanised steel	Support tube M4	350 01 226 930
8 Mounting plate M4 for high insulation (50-350 mm), installation height (50-350 mm) made to measure (higher on request), hot-dip galvanised steel	Support tube M4	350 01 222 510

Wall consoles		
9 Wall bracket Z, 180 mm, hot-dip galvanised steel	Support tube Z	350 01 205 000

Bases		
10 Concrete base Z, 40 kg, Ø 60 x 8.5 cm, light concrete	Support tube Z	350 01 111 116
1 pallet (20 pieces) concrete base Z, 40 kg, Ø 60 x 8.5 cm, light concrete	Support tube Z	350 01 112 116
10 ¹ Concrete base Z, 40 kg, Ø 60 x 8.5 cm	Support tube Z	350 01 109 529
10 Concrete base Z, 55 kg, Ø 60 x 11 cm, light concrete	Support tube Z	350 01 111 216
1 pallet (20 pieces) concrete base Z, 55 kg, Ø 60 x 11 cm, light concrete	Support tube Z	350 01 112 216
10 Concrete base Z, 70 kg, Ø 75 x 9 cm, light concrete	Support tube Z	350 01 111 316
11 Natural granite base Z, 40 kg, 50 x 50 x 8 cm, natural stone, matt NEW	Support tube Z	350 01 109 432
11 ¹ Natural granite base Z, 55 kg, 59 x 59 x 8 cm, natural stone	Support tube Z	350 01 109 447
11 Natural granite base Z, 55 kg, 59 x 59 x 8 cm, natural stone, matt NEW	Support tube Z	350 01 109 434
11 Natural granite base Z, 90 kg, 75 x 75 x 8 cm, natural stone, matt NEW	Support tube Z	350 01 109 436
12 ³ Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, galvanised steel		350 01 109 487
12 ^{3,8} Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, high-grade steel 1.4301 / 304		350 01 109 486
13 Steel base Z 40 kg, 58.5 x 58.5 x 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 810
13 Steel base Z 55 kg, 68.5 x 68.5 x 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 910
14 ³ Set of castors for steel base Z, 40/55 kg, Ø 5 cm, galvanised steel		350 01 101 001
14 ^{3,8} Set of castors for steel base Z, 40/55 kg, Ø 5 cm, high-grade steel 1.4301 / 304		350 01 101 000

Bases with castors		
15 ^{3,7} Base with castors Z, 55 kg, 65 x 65 x 11 cm, light concrete (without decorative plate)	Support tube Z + decorative plate	350 01 113 200
^{3,7} 1 pallet (5 pieces) base with castors Z, 55 kg, 65 x 65 x 11 cm, light concrete (without decorative plate)	Support tube Z + decorative plate	350 01 113 280
16 ¹ Decorative plate in grey white RAL 9002 for base with castors Z, 55 kg, aluminium composite		350 01 113 310
17 Decorative plate in anthracite RAL 7016 for base with castors Z, 55 kg, aluminium composite		350 01 113 320
18 ^{3,7} Base with castors Z, 90 kg, 80 x 80 x 11 cm, light concrete NEW	Support tube Z	350 01 113 400
^{3,7} 1 pallet (5 pieces) base with castors Z, 90 kg, 80 x 80 x 11 cm, light concrete NEW	Support tube Z	350 01 113 480

Support tubes/connection tubes		
19 Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 201 210
19 Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 201 282
19 Support tube Z, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 201 300
20 Support tube M4, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 200 035
21 Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 206 001
22 Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 206 082
21 Connection tube PX, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 206 011

¹while stocks last

³only suitable for smooth, joint free surface coverings

⁷55 / 90 kg: Ground clearance 7 mm

⁸suitable for corrosive environments